

ROSMECH®

ECOLOGY HOSES & ACCESSORIES



HOSE REELS




SEWER CLEANING



TRAILERS



WATER JETTING

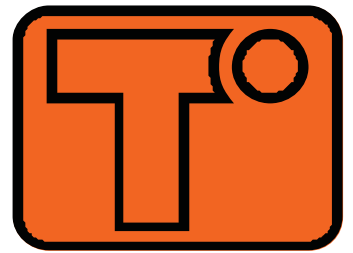

ROSMECH®

ECOLOGY HOSES & ACCESSORIES



HOSES

Part No.	Fittings	Available Lengths	Hose Size (inch)	WP		BP		Weight		Safety Factor
				bar	psi	bar	psi	g/m	lbs/ft	
FJG150	3/4" M/F BSP	150 m	3/4"	210	3,000	525	7,500	500	0,336	2,5:1
FKI150	1" M/F BSP	150 m	1"	210	3,000	525	7,500	695	0,467	2,5:1
FKI180	1" M/F BSP	180 m	1"	210	3,000	525	7,500	695	0,467	2,5:1
FLK180	1+1/4" M/F BSP	180 m	1+1/4"	210	3,000	525	7,500	940	0,632	2,5:1

FITTINGS

Part No.	Description
SBH177	3/4 F-BSPP C 3/4
SDA177	3/4 M-BSPP C 3/4
SA5171	3/4 Ferrule TP-5
SN7177	3/4 Hose Mender C 3/4
SBH188	1 F-BSPP C 1
SDA188	1 M-BSPP C 1
SA5181	1 Ferrule TP-5
SN7188	1 Hose Mender C 1
SBH199	1+ 1/4 F-BSPP C 1+ 1/4
SDA199	1+ 1/4 M-BSPP C 1+ 1/4
SA5191	1+ 1/4 Ferrule TP-5
SN7199	1+ 1/4 Hose Mender C 1+ 1/4

INNER TUBE

Thermoplastic polymer

REINFORCEMENT

One or two braids of synthetic fiber plus one special extra braid of synthetic fiber for cover integration.

COVER

Polyurethane (blue), non pinpricked, black ink-jet branding.

APPLICATIONS

Standard sewer cleaning vehicles and applications. Cleaning equipment used in high humidity environments

FEATURES

- Blue cover impregnated into braid reinforcement for optimum wear resistance and longevity.
- Available in fixed lengths.
- Excellent crush and cut resistance.
- Lightweight compared to rubber alternatives.
- Cover resistant against micro-biological attack.
- Reduced bend radius.
- Fast operating speeds.

TEMPERATURE RANGE

-40 °C to +60 °C (-40 °F to +140 °F)

DESCRIPTION

Available with BSP and / or NPT fitting combinations. Not suitable for hydraulic applications. Factory made assemblies only; please contact our spare parts office for further details

APPLICATIONS



HOSE REELS



SEWER CLEANING



TRAILERS



WATER JETTING